



STAY POWERED. STAY COOL

## USER'S MANUAL




65W Built-in Retractable Cable  
**GaN Charger**

# Product Introduction

1. This product is a 65W charger manufactured using a new semiconductor material (GaN). It features a small size, rich interfaces and a complete set of fast charging protocols.
2. It supports fast charging protocols such as QC2.0/QC3.0/PD2.0/PD3.0/APPLE2.4A/FCP/SCP/QC4+ . The maximum output power of the single-port of Type-C1/Type-C2 can reach 65W(20V=3.25A).
3. This product is built with multiple safety protection circuits such as overcurrent protection, overvoltage protection and temperature protection making charging safer. It has obtained certifications such as CCC, FCC, PSE and UL report.
4. This device complies with part 15 of the FCC rules.

## Wireframe

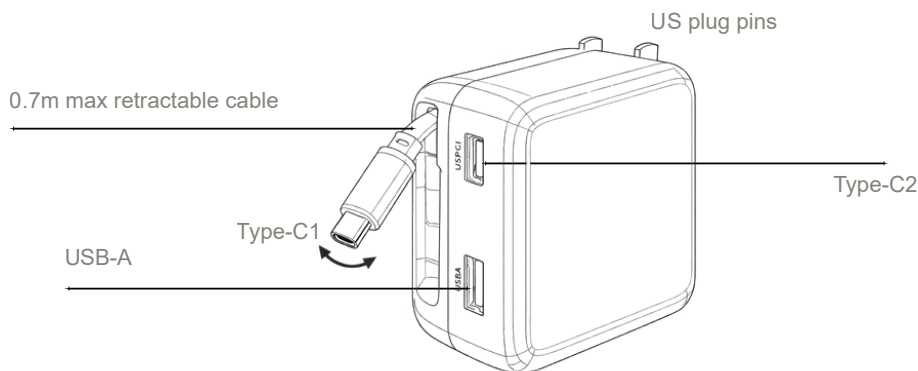

# Specifications

|                  |                                                                                    |
|------------------|------------------------------------------------------------------------------------|
| Name             | 65W Built-in Retractable Cable GaN Charger                                         |
| Brand            | YOKOOL                                                                             |
| Model            | RC502                                                                              |
| Input            | 100-240V ~ 50/60Hz 1.3A Max                                                        |
| USB-C1/C2 Output | 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A (65WMax)                                   |
| USB-A Output     | 5V=3A, 9V=2A ,12V=1.5A (18W)                                                       |
| USB C1+C2        | 45W+18W/18W+45W                                                                    |
| USB C1+A1        | 5V=3A, 9V=3A, 12V=3A, 15V=2.5A, 20V=2.25A(45WMax) + 5V=2.4A, 9V=2A, 12V=1.5A (18W) |
| USB C1+(C2+A)    | 45W+15W C2+A1:5V=3A (15W)                                                          |
| Color            | White                                                                              |
| Material         | PC                                                                                 |
| Protocol         | QC2.0/QC3.0/PD2.0/PD3.0/APPLE2.4A/FCP/SCP/QC4+                                     |
| Cable length     | 0.7m Max                                                                           |

# Maintenance

1. Regularly clean the surface of the charger to keep it clean and tidy (however, do not use cleaning agents containing organic solvents such as alcohol and gasoline).
2. Avoid using the charger in an environment with extremely high or low temperatures for a long time.
3. If the charger is not used for a long time, unplug it from the power socket and store it properly.

## Warning

1. This charger is suitable for indoor use.
2. Do not use the charger in harsh environments such as high temperature, humid, flammable or explosive conditions.
3. If you notice abnormal heat generation, smoking, strange odors, noises or significantly abnormal charging speed during the charging process, stop using it immediately, unplug the charger from the power socket, and contact the after-sales services personnel for inspection and repair.
4. Properly store the charger and charging cable in a dry, ventilated place that is out of reach of children,
5. It is strictly prohibited to disassemble, modify or attempt to repair this charger. If the charger malfunctions, please contact our official after-sales services center for repair or replacement.
6. Please use this charger to charge devices that meets its output specifications.
7. It is strictly prohibited to insert metal objects or other foreign objects into the charger interface.

## HƯỚNG DẪN SỬ DỤNG




Bộ sạc nhanh GaN công suất  
65W có tích hợp sẵn dây sạc

# Giới thiệu sản phẩm

1. Sản phẩm này là một bộ sạc nhanh 65W được sản xuất sử dụng công nghệ bán dẫn mới (GaN). Nó có đặc tính là nhỏ gọn, nhiều cổng sạc và hỗ trợ nhiều giao thức sạc nhanh.
2. Bộ sạc nhanh này hỗ trợ các chuẩn sạc nhanh như: QC2.0/QC3.0/PD2.0/PD3.0/APPLE2.4A/FCP/SCP/QC4+/PPS. Công suất tối đa khi sử dụng 1 cổng Type-C1 hoặc Type-C2 có thể đạt được là 65W(20V=3.25A).
3. Sản phẩm này được thiết kế với nhiều cơ chế bảo vệ mạch như: bảo vệ chống quá dòng, chống quá áp và chống quá nhiệt giúp nó sạc điện một cách an toàn. Nó đã đạt được các chứng chỉ an toàn của CCC, FCC, PSE và báo cáo UL.
4. Sản phẩm này tuân thủ theo Phần 15 của các quy tắc FCC.

## Giới thiệu các bộ phận

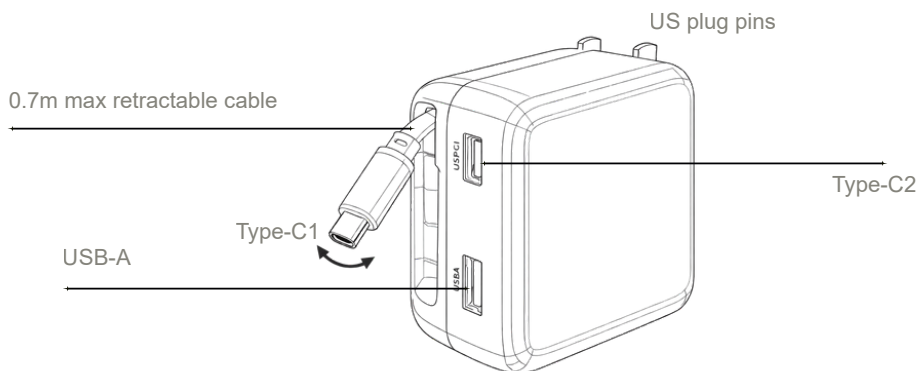

# Thông số sản phẩm

|                         |                                                                                    |
|-------------------------|------------------------------------------------------------------------------------|
| Tên sản phẩm            | Bộ sạc nhanh GaN công suất 65W có tích hợp sẵn dây sạc                             |
| Thương hiệu             | YOKOOL                                                                             |
| Model                   | RC502                                                                              |
| Đầu vào                 | 100-240V ~ 50/60Hz 1.3A Max                                                        |
| Đầu ra USB-C1/C2        | 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A (65WMax)                                   |
| Đầu ra USB-A Output     | 5V=3A, 9V=2A ,12V=1.5A (18W)                                                       |
| USB C1+C2               | 45W+18W/18W+45W                                                                    |
| USB C1+A1               | 5V=3A, 9V=3A, 12V=3A, 15V=2.5A, 20V=2.25A(45WMax) + 5V=2.4A, 9V=2A, 12V=1.5A (18W) |
| USB C1+(C2+A)           | 45W+15W C2+A1:5V=3A (15W)                                                          |
| Màu                     | Trắng                                                                              |
| Chất liệu vỏ            | PC                                                                                 |
| Hỗ trợ chuẩn sạc        | QC2.0/QC3.0/PD2.0/PD3.0/APPLE2.4A/FCP/SCP/QC4+/PPS                                 |
| Độ dài dây cáp tích hợp | Tối đa 0.7m                                                                        |

# Bảo quản

1. Thường xuyên lau chùi vỏ ngoài của bộ sạc nhanh để giữ nó sạch sẽ (tuy nhiên, không được lau bằng các dung dịch chứa chất hữu cơ như cồn hoặc xăng).
2. Tránh sử dụng bộ sạc nhanh trong các môi trường khắc nghiệt như nhiệt độ quá cao hoặc quá thấp trong thời gian dài.
3. Nếu không sử dụng bộ sạc nhanh trong thời gian dài, hãy rút nó ra khỏi ổ điện và bảo quản một cách thích hợp.

## Cảnh báo

1. Bộ sạc nhanh này thích hợp để sử dụng trong nhà.
2. Không sử dụng bộ sạc nhanh trong các môi trường khắc nghiệt như nhiệt độ quá cao hoặc quá thấp, môi trường ẩm ướt, dễ cháy hoặc dễ nổ.
3. Nếu bạn thấy nhiệt độ cao bất thường, khói, mùi lạ, tiếng ồn hoặc tốc độ sạc bất thường, hãy rút bộ sạc nhanh ra khỏi nguồn điện ngay lập tức và liên hệ với nhân viên chăm sóc khách hàng để kiểm tra và sửa chữa.
4. Cất giữ bộ sạc nhanh và dây sạc ở nơi khô ráo, thoáng khí và tránh xa tầm tay của trẻ em.
5. Nghiêm cấm không được tháo rời bộ sạc nhanh, thay đổi hoặc cố gắng sửa chữa nó. Nếu bộ sạc nhanh bị hỏng, hãy liên hệ với nhân viên chăm sóc khách hàng của chúng tôi để sửa chữa hoặc thay thế.
6. Vui lòng sử dụng bộ sạc nhanh này để sạc điện cho các thiết bị đáp ứng các thông số sạc đầu ra.
7. Nghiêm cấm cắm các vật kim loại hoặc các vật ngoại lai vào bên trong bộ sạc nhanh.